

Material Product Data Sheet

Pure Titanium and Titanium Alloy Powders

Powder Products:

Metco™ 4010 series, Metco 4012 series, Metco 4013 series, Metco 4016 series, Metco 4023 series, Metco 4024 series, Metco 4027 series, Metco 4028 series, Metco 4030 series, Metco 4031 series, Metco 4032 series, Metco 4033 series

1 Introduction

Oerlikon Metco's titanium and titanium alloy powders produce coatings having a range of characteristics not found in any other thermal spray powder materials. The coatings are light in weight with high strength-to-weight ratio and resistant to most corrosives. Titanium readily combines with other metals to form useful alloys. Owing to these suitable mechanochemical properties, pure titanium and titanium alloy powders can be employed in a number of applications via chemical, powder metallurgy and thermal spray processes.




Thermal spray coatings of titanium-based materials are commonly used in medical applications where biologic compatibility is required. Additionally, these coatings may also be used as a potential bond coat for hydroxylapatite coatings that are often used as a top-coat on biomedical implants. Titanium powders may also be used to produce dense, corrosion resistant coatings. Titanium powders have strong affinity and reactivity with oxygen, hydrogen and nitrogen at high temperatures. Most of the thermal spray coatings from these powders are produced under controlled atmosphere conditions (low pressure or soft vacuum).

1.1 Typical Uses and Applications

- Biomedical applications (coatings on prosthetic implants)
- Corrosion resistant coatings
- Bond coat for hydroxylapatite coatings
- Metal injection molding applications
- Cold and hot isostatic pressing applications
- Repair of aerospace and automotive parts using LD / LD

Quick Facts

Classification	Titanium based
Chemical formula	Ti 99.5+ or Ti 6Al 4V
Manufacture	HDH (hydride-dehydride) or Atomization
Morphology	Angular / blocky or Spherical
Apparent density	1.8 – 2.5 g/cm ³
Melting point	1649 (3000 °F)
Service Temperature	≤ 400 °C (750 °F)
Purpose	Corrosion resistance, bio-compatibility
Process	ChamPro™ (LVPS, LPPS, VPS), Cold Spray, Laser Cladding / Laser Deposition (LC / LD), High Speed Laser Cladding (HS-LC), Metal Injection Molding (MIM), Hot Isostatic Pressing (HIP)

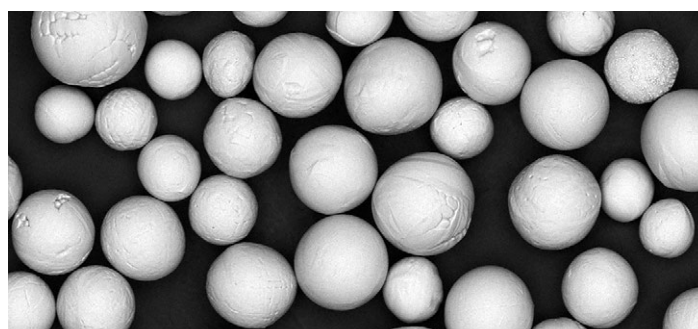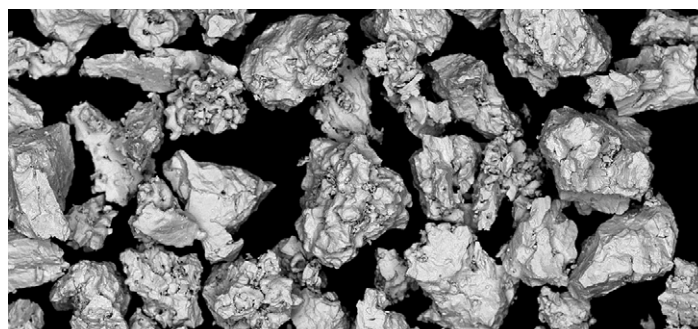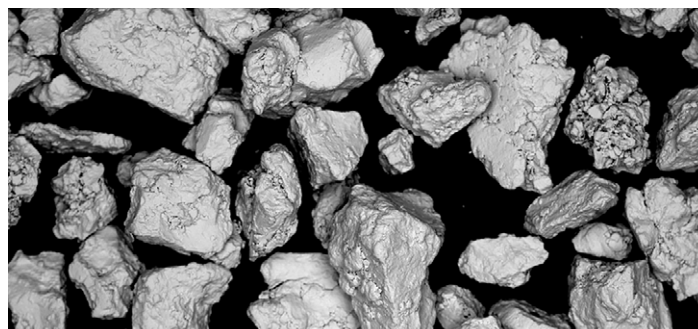

Typical powder morphologies. Top: Powder from wrought raw material. Middle: Powder from sponge raw material. Bottom: Spherical powder.

2 Material Information

2.1 Chemistry

Product	Nominal Chemical Composition (wt. %)													
	Ti	Al	V	Fe	C	H	O	N	Cu	Sn	Y	Si	Cl	Mg
CP Ti Grade 1														
Metco 4012 series	Bal.	---	---	< 0.2	< 0.08	< 0.015	< 0.18	< 0.03	---	---	---	---	---	---
Metco 4023 series	Bal.	---	---	< 0.2	< 0.08	< 0.015	< 0.18	< 0.03	---	---	---	---	---	---
CP Ti Grade 2														
Metco 4013 series	Bal.	---	---	< 0.3	< 0.08	< 0.015	< 0.25	< 0.03	---	---	---	---	---	---
Metco 4024 series	Bal.	---	---	< 0.3	< 0.08	< 0.015	< 0.25	< 0.03	---	---	---	---	---	---
CP Ti Grade 3														
Metco 4027 series	Bal.	---	---	< 0.3	< 0.08	< 0.015	< 0.35	< 0.05	---	---	---	---	---	---
CP Ti Grade 4														
Metco 4010 series	Bal.	---	---	< 0.5	< 0.08	< 0.015	< 0.4	< 0.05	---	---	---	---	---	---
Metco 4016 series	Bal.	< 0.05	---	< 0.15	< 0.03	< 0.030	< 0.4	< 0.02	---	---	---	< 0.04	< 0.20	< 0.5
Metco 4028 series	Bal.	---	---	< 0.5	< 0.08	< 0.015	< 0.4	< 0.05	---	---	---	---	---	---
Ti 6Al 4V Grade 5														
Metco 4030 series	Bal.	5.5 – 6.75	3.5 – 4.5	< 0.3	< 0.08	< 0.015	< 0.2	< 0.05	< 0.1	< 0.1	< 0.005	---	---	---
Metco 4031 series	Bal.	5.5 – 6.75	3.5 – 4.5	< 0.3	< 0.08	< 0.015	< 0.2	< 0.05	< 0.1	< 0.1	< 0.005	---	---	---
Ti 6Al 4V Grade 23														
Metco 4032 series	Bal.	5.5 – 6.50	3.5 – 4.5	< 0.25	< 0.08	< 0.012	< 0.13	< 0.05	< 0.1	< 0.1	< 0.005	---	---	---
Metco 4033 series	Bal.	5.5 – 6.50	3.5 – 4.5	< 0.25	< 0.08	< 0.012	< 0.13	< 0.05	< 0.1	< 0.1	< 0.005	---	---	---

2.2 Particle Size Distribution, ASTM Grade, and Other Properties

Product	Nominal Particle Size Distribution ^a		Grade (ASTM)	Manufacturing Method ^b	Morphology
	µm	mesh (ASTM)			
Metco 4012A	-106 +45	-140 +325	Grade 1	HDH – wrought	Angular / Blocky
Metco 4023B	-106 +45	-140 +325		Atomized	Spherical
Metco 4013A	-106 +45	-140 +325	Grade 2	HDH – wrought	Angular / Blocky
Metco 4024B	-106 +45	-140 +325		Atomized	Spherical
Metco 4027A	-25 +5	-500 +2500	Grade 3		
Metco 4010E	-350 +200	-45 +70			
Metco 4010D	-250 +90	-60 +170			
Metco 4010B	-180 +75	-80 +200		HDH – wrought	
Metco 4010A	-90 +22	-170 +575	Grade 4		Angular / Blocky
Metco 4010C	-45 +11	-325 +1160			
Metco 4016A	-180 +75	-80 +200		HDH – sponge	
Metco 4016B	-125 +90	-120 +170			
Metco 4028A	-25 +5	-500 +2500		Atomized	Spherical
Metco 4030A	-250 +150	-60 +100			
Metco 4030B	-180 +75	-80 +200		HDH – wrought	Angular / Blocky
Metco 4030C	-106 +45	-140 +325	Grade 5		
Metco 4031A	-106 +45	-140 +325		Atomized	Spherical
Metco 4031C	-53 +20	-270 +625			
Metco 4031B	-25 +5	-500 +2500			
Metco 4032A	-106 +45	-140 +325	Grade 23	HDH – wrought	Angular / Blocky
Metco 4033A	-106 +45	-140 +325		Atomized	Spherical
Metco 4033C	-53 +20	-270 +625			

^a Analysis of particle size 45 µm (325 mesh) and above via sieve; analysis of particle size less than 45 µm (325 mesh) via wet laser diffraction (Microtrac)

^b HDH – wrought: Hydride-dehydride process from wrought raw materials; HDH – sponge: Hydride-dehydride process from sponge raw material

2.3 Key Selection Criteria

- Use coarser pure titanium powders such as Metco 4010E, Metco 4010D or Metco 4010B and titanium alloy powders such as Metco 4030A or Metco 4030B to produce coatings with very high surface roughness and porosity. These types of coatings are often desirable for biomedical implant applications because the porous structure is believed to promote bone growth onto the implants.
- Use fine powders such as Metco 4010C to produce relatively smooth and dense coatings. These types of coatings may be suitable for applications requiring corrosion resistance.
- Grade 4 and Grade 5 titanium powders are recommended for use in biomedical applications.
- For some biomedical applications, layers of both the fine and the coarse powders may be applied serving different functions.

- Metco 4016A and Metco 4016B are sponge products which are less dense and exhibit porosity in the powder particles. These types of powders can not only be used for thermal spray coatings, but can also be used to form parts using HIP (Hot Isostatic Pressing).
- HDH powder products are less expensive than atomized powder products.
- Atomized products are comprised of fully dense powder particles that are free-flowing and highly spreadable. These products will also give the best results for processes that require a high packing density to achieve high loading, such as MIM.

2.4 Related Products

- Metco Titanium, a solid 1.63 mm (14 ga) wire applied using electric arc wire spray, can be used for similar applications. However, this product is generally suitable when thick coatings are desired.

2.5 Recommended Processes

The table below indicates recommended use for each product; however, for specific applications, customers can choose to use the products for other processes.

Product	ChamPro	Cold Spray	LC / LD	HS-LC	MIM	HIP
Metco 4010A	✓					
Metco 4010B	✓					
Metco 4010C	✓	✓		✓		
Metco 4010D	✓					
Metco 4010E	✓					
Metco 4012A	✓		✓			
Metco 4013A	✓		✓			
Metco 4016A	✓					
Metco 4016B	✓					
Metco 4023B			✓			✓
Metco 4024B			✓			✓
Metco 4027A		✓		✓	✓	
Metco 4028A		✓		✓	✓	
Metco 4030A	✓					
Metco 4030B	✓					
Metco 4030C	✓					
Metco 4031A			✓			✓
Metco 4031B		✓	✓		✓	
Metco 4031C		✓	✓	✓	✓	
Metco 4032A	✓		✓			
Metco 4033A			✓			✓
Metco 4033C		✓	✓	✓	✓	

2.6 Specifications

Product	Specification
CP Ti Grade 1	
Metco 4012 series	ASTM B348 (chemistry only)
Metco 4023 series	
CP Ti Grade 2	
Metco 4013 series	ASTM B348 (chemistry only)
Metco 4024 series	
CP Ti Grade 3	
Metco 4027 series	ASTM B348 (chemistry only)
CP Ti Grade 4	
Metco 4010 series	ASTM F1580
Metco 4016 series	
Metco 4028 series	
Ti 6Al 4V Grade 5	
Metco 4030 series	ASTM F1580
Metco 4031 series	SAE International AMS 4998
Ti 6Al 4V Grade 23	
Metco 4032 series	ASTM F136 (chemistry only)
Metco 4033 series	

3 Coating Information

3.1 Key Thermal Spray Coating Information

Application in inert or vacuum atmospheres are recommended to prevent excessive fuming and oxidation that can have an undesirable affect the coating microstructure and properties and to avoid hazardous conditions.

3.2 Coating Parameters

Please contact your Oerlikon Metco Account Representative for parameter availability. For specific coating application requirements, the services of Oerlikon Metco's Coating Solution Centers are available.

4 Commercial Information

4.1 Ordering Information and Availability

Product	Order No.	Package Size	Availability	Distribution
Metco 4010A	1098594	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010B	1101154	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010C	1101155	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010D	1101156	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4010E	1096845	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4012A	1101157	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4013A	1101158	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4016A	1060305	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4016B	1072415	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4023B	1101162	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4024B	1101163	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4027A	1101169	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4028A	1101170	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4030A	1099885	10 lb (approx 4.5 kg)	Stock	Global
Metco 4030B	1099886	10 lb (approx 4.5 kg)	Stock	Global
Metco 4030C	1101159	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4031A	1101164	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4031B	1101165	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4031C	1101166	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4032A	1101160	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4033A	1101167	1.5 kg (approx. 3.3 lb)	Stock	Global
Metco 4033C	1101168	1.5 kg (approx. 3.3 lb)	Stock	Global

4.2 Handling Recommendations

- Store in the original container in a dry location.
- Open containers should be stored in a drying oven below 38°C (100 °F) to prevent moisture pickup.
- Tumble contents prior to use to prevent material segregation.

4.3 Safety Recommendations

See the SDS (Safety Data Sheet) localized for the country where the material will be used. SDS are available from the Oerlikon Metco web site at www.oerlikon.com/metco (Resources – Safety Data Sheets).

Product	SDS No.
Metco 4010A	50-2147
Metco 4010B	50-2418
Metco 4010C	50-2147
Metco 4010D	50-2418
Metco 4010E	50-2418
Metco 4012A	50-2418
Metco 4013A	50-2418
Metco 4016A	50-1157
Metco 4016B	50-2418
Metco 4023B	50-2418
Metco 4024B	50-2418
Metco 4027A	50-2147
Metco 4028A	50-2147
Metco 4030A	50-941
Metco 4030B	50-941
Metco 4030C	50-2146
Metco 4031A	50-2146
Metco 4031B	50-2149
Metco 4031C	50-2149
Metco 4032A	50-2146
Metco 4033A	50-2146
Metco 4033C	50-2149